



Top Load Laundry Centre

CFLE1011MW

3.4 Cu.Ft. Washer I.E.C.
5.5 Cu.Ft. Dryer I.E.C.
Electric



Product Dimensions

Height	76"
Width	27"
Depth	31-1/2"

More Easy To Use Features

Multiple Wash Cycles

Features multiple wash cycles to meet all of your washing needs such as delicate and heavy duty.

Ready-Select® Controls

It's easy to get laundry started with just the touch of a button.

Timed Dry Cycles

Available in:



Classic White (W)

Signature Features

A Gentle Wash

Immersion Care™ Wash Action moves water through clothes in waves for less stretching, tangling and wrinkling.

Cleaner, Fresher Laundry

Our advanced rinse technology uses fresh water during the final rinse to ensure that your whites are whiter and to reduce allergens.

Vibration Control System


Advanced vibration control keeps even oversized loads balanced for smooth, quiet operation. Ideal for second floor installation.

Balanced Dry System

Draws large volumes of air through the back of the drum, then distributes it evenly for safe, efficient drying.

Washer Features	
Washer Type	HE Top Load
Total Capacity I.E.C. (Cu.Ft.)	3.4
Controls	Ready-Select®
Washer Interior	Polypropylene
Vibration Control System	Yes
Suspension System	Sure-Spin™
Wash System	Immersion Care™ Action
Fresh Water Rinse	Yes
Automatic Temperature Control	
Water Level Adjustments	Yes
Bleach Dispenser / Detergent Dispenser	Yes / No
Fabric Softener Dispenser	
Cycle Signal	
Cycle Signal "On/Off"	
Agitate Speeds (Strokes / Min.)	Variable
Spin Speeds (RPM)	600
Sound Package	
Wash Cycles	
Wash Cycles / Specialty Cycles	8 / 0
Washer Options	
Temperature Selections	3 (Rotary)
Water Levels	3
Energy Saver Option	
Dryer Features	
Total Capacity I.E.C. (Cu.Ft.)	5.5
Dryer Drum Interior	Painted Steel
Interior Light	
Wrinkle Release Technology	
DrySense™ Technology	
Moisture Sensor	
Cycle Signal	
Cycle Signal "On/Off"	
Tumble Speed (RPM)	50
Lint Screen	Yes
Sound Package	
Dry Cycles	
Dry Cycles / Specialty Cycles	8 / 0
Dryer Options	
Temperature Selections	3
Dryness Level Selections	0
Timed Dry (Minutes)	15, 30, 60, 90
Optional Accessories	
Mobile Home Installation Kit	PN# 137067200
Drain Hose Extension Kit	PN# 134592700
Drying Rack	PN# DRLC
Certifications	
ENERGY STAR®	
NSF® Certified	
Specifications	
Maximum Exhaust Duct Length¹ (Ft.)	56
Power Supply Connection Location	Middle Rear
Water Inlet Connection Location	Middle Rear
Voltage Rating	240V / 60Hz / 30A
Connected Load (kW Rating) @ 240 Volts	5.1
Amps @ 240 Volts	22
Heating Element @ 240 Volts (Watts)	4,500
Shipping Weight (Approx.)	275 Lbs.

¹Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

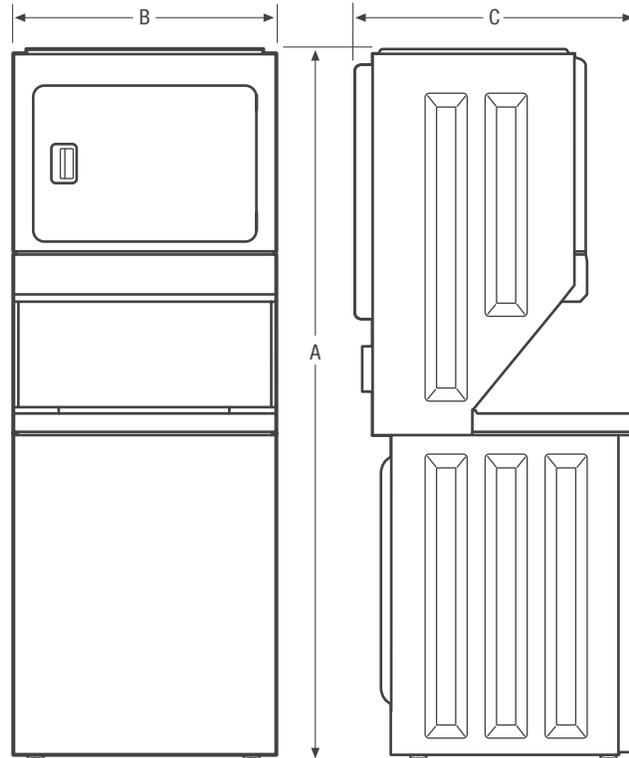

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions	
A - Height	76"
B - Width	27"
C - Depth	31-1/2"
Depth with Door Open 90°	47-1/2"

Accessories information available on the web at frigidaire.ca