



20.4 Cu. Ft. Top Freezer Refrigerator

Top Freezer Refrigerator

Available Products: FFHT2033VE, FFHT2033VP, FFHT2033VS

Available Colors: Ebony Black, Pearl White, Stainless Steel

Version: 08/22

Product Specifications

Refrigerator

Crisper Color	Clear
Dairy Bin	Yes
Deli Drawer	Yes
Door Bin Color	White
Humidity Controls	Automatic
Interior Lighting	LED
Number of Fixed Gallon Door Bins	1
Number of Other Door Bins	3
Number of Pull Out Shelves	2
Number of Crispers	2

Ice Maker

Ice Maker	No
-----------	----

Exterior

Door Stops	Yes
Front Rollers	No
Rear Rollers	Yes

Electrical Specifications

Minimum Circuit Required	15 Amps
--------------------------	---------

Certifications and Approvals

ADA Compliant	No
---------------	----

Safety Certifications and Approvals

CSA Listed	Yes
UL Listed	Yes
ETL Listed	No
NSF Certified	No

Freezer

Baskets / Bins Color	Clear
Shelf Material	Wire
Number of Fixed Door Bins	2
Number of Fixed Shelves	1

Controls

Digital Display	No
-----------------	----

Dimensions and Volume

Height With Hinge	69"
Height Without Hinge	68 1/4"
Width	29 5/8"
Width of Cabinet	29 5/8"
Depth of Cabinet	28 1/2"
Depth With Door	31 3/4"
Depth With Door 90° Open	60"
Depth With Door and Handle	34 1/8"
Fresh Food Capacity	15.3 Cu. Ft.
Freezer Capacity	5.1 Cu. Ft.
Total Capacity	20.4 Cu. Ft.

General Specifications

Annual Energy	387 kWh
Condenser Type	Dynamic
Prop 65 Label	No
Refrigerant Type	R-134
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Performance Certifications and Approvals


ENERGY STAR Certified	Yes
-----------------------	-----

Available Products: FFHT2033VE, FFHT2033VP,
FFHT2033VS


Available Colors: Ebony Black, Pearl White, Stainless Steel

Version: 08/22

Installation Diagram

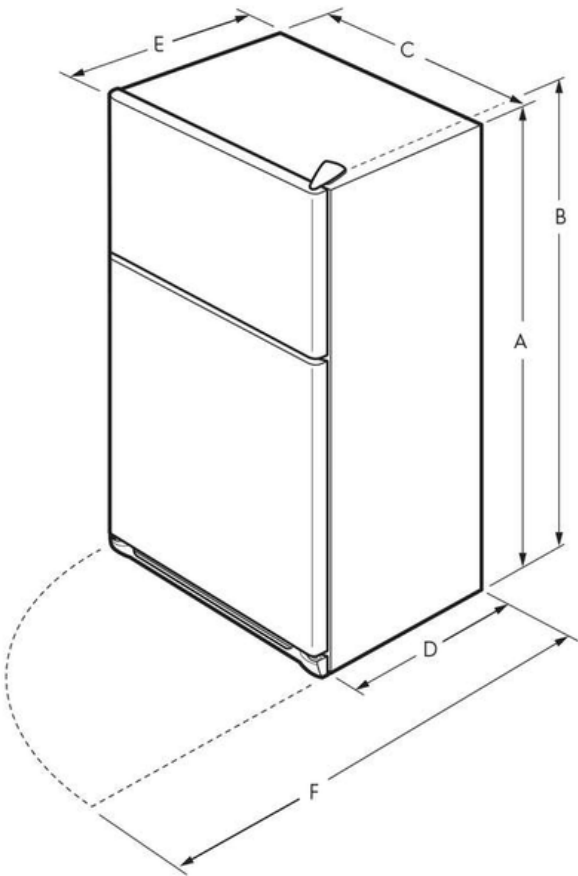

A	59 7/8"
B	60 1/2"
C	27 5/8"
D	25 1/4"
E	29 3/8"
F	53 5/8"

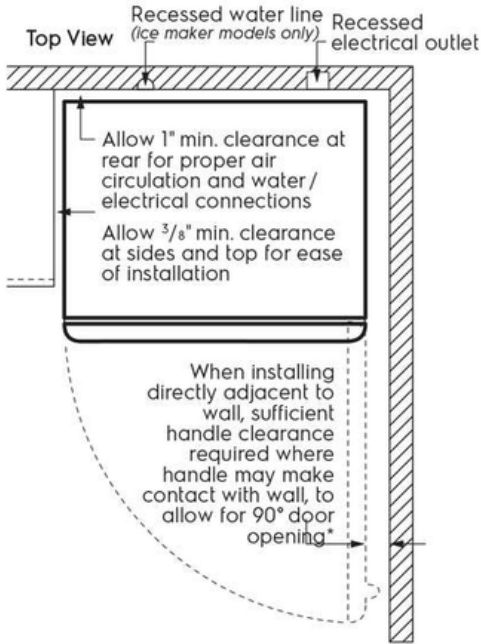

* When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)