



30" Induction Freestanding Range

Induction Range

Available Products: ECFI3068AS

Available Colors: Stainless Steel

Version: 11/25

Product Specifications

Cooking Controls

Bake	Yes
Bread Proof	Yes
Broil	Yes
Child Lock	Yes
Convection Bake	Yes
Convection Roast	Yes
Cook Time	Yes
Delay Start	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Probe	Yes
Steam Clean	Yes
Temperature Display	Yes

Cooktop

Bridge Element Location	Left
Cooking Surface Type	Smooth
Hot-Surface Indicator Light	Yes

Controls

Sabbath Mode	Yes
--------------	-----

Dimensions and Volume

Minimum Height	35 3/8"
Maximum Height	36 5/8"
Width	29 469/500"
Depth	24 7/8"
Depth With Door 90° Open	46 86/125"
Oven Interior Height	17 1/4"
Oven Interior Width	24 1/4"
Oven Interior Depth	16"
Oven Capacity	4.6 Cu. Ft.

Installation

Adjustable Leveling Legs	Yes
Included Power Cord Type	4-Prong Plug
Power Cord Included	Yes

Certifications and Approvals

ADA Compliant	Yes
---------------	-----

Oven

Bake Element	3300 Watts
Bake Element Type	Hidden
Broil Element	3300 Watts
Convection Element	2950 Watts
Convection Type	True
Number of Convection Fans	1
Number of Rack Positions	6
Oven Interior Color	Gray
Oven Light Quantity	2
Oven Light Type	Halogen
Oven Light Watts	40 Watts
Rack Position Type	Ladder
Rack Type 1	Flat
Rack Type 1 Quantity	2
Rack Type 2	Glide
Rack Type 2 Quantity	1
Window Type	Extra Large Window

Cooktop Performance

Right Front Element Burner Size	5 7/10"
Right Rear Element Burner Size	8 3/10"
Left Front Element Burner Size	7 1/10"
Left Rear Element Burner Size	7 1/10"
Right Front Element Burner	1,400 / 2,200 Watts (Boost)
Right Rear Element Burner	2,300 / 3,700 Watts (Boost)
Left Front Element Burner	1,850 / 3,000 Watts (Boost)
Left Rear Element Burner	1,850 / 3,000 Watts (Boost)

Display

Control Location	Front
Display Type	LED

Electrical Specifications

Amps @ 240 Volts	40 Amps
Connected Load @ 240V	11 kW
Voltage Rating	240 V

Right to Repair Details

Right to Repair

Partially Available - Visit electrolux.ca/en/Owner-Support/right-to-repair for more information

General Specifications


Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals

cUL Listed	Yes
RoHS	Yes
UL Listed	Yes

Installation Diagram

Cabinet clearances

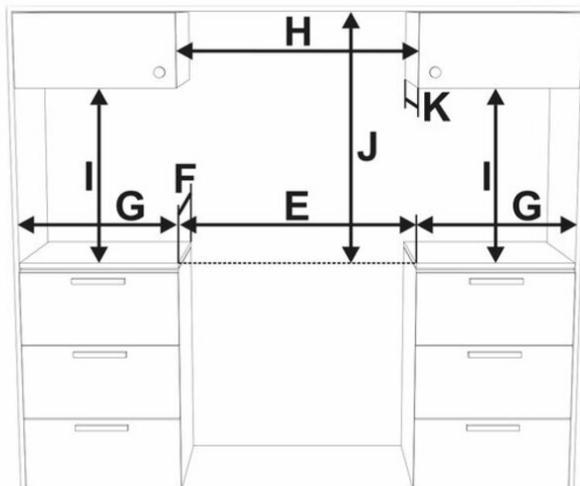


E	762 mm	30"
F	603 mm	23" 3/4
G	178 mm	7"
H	min. 762 mm	min. 30"
I	min. 457 mm	min. 18"
J	see notes below	
K	max. 330 mm	max. 13"

Clearance **J** can have the following values:

- **J = 30" / 762 mm** minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet.
- **J = 24" / 610 mm** minimum when the bottom of wood or metal cabinet is protected by not less than 1/4-inch-thick flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015-inch-thick stainless steel, 0.024-inch-thick aluminum, or 0.020-inch-thick copper. Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 30" should be approved by the local codes and/or by the local authority having jurisdiction.

Product Dimensions

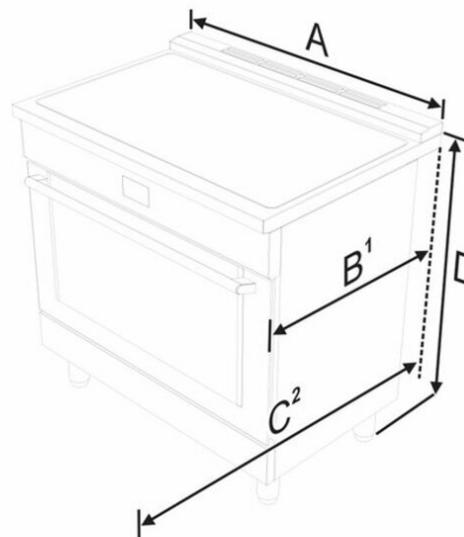

A	760 mm	29 15/16"
B¹	min: 627 mm max: 631 mm	min: 24 11/16" max: 24 13/16"
C²	1186 mm	46 11/16"
D	min: 898 mm max: 930 mm	min: 35 6/16" max: 36 5/8"

1. Measurement **B** varies according to the model: the minimum is obtained without the rear spacers (see "Island installation") and the maximum is obtained for traditional installation (slot-in installation - with the rear spacers).
2. Measurement **C** refers to the open door.