

Single Wall Ovens

FFEW2425Q S/W/B

24" Electric



Product Dimensions

| | |
|--------|----------|
| Height | 31-7/16" |
| Width | 23-7/8" |
| Depth | 25-3/16" |

More Easy-To-Use Features

Attractive Stainless Steel Exterior¹

Dual Radiant™ Baking and Roasting

A.D.A. Compliant

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.



Available in:



Stainless (S)



White (W)



Black (B)

¹Select models only.

Signature Features

Self-Cleaning

Your oven cleans itself—so you don't have to. Self clean options available in 2 and 3-hour cycles.

Vari-Broil™ Temperature Control

Allows you to choose between two heat levels.

Ready-Select® Controls

Easily select options or control cooking temperature with our easy-to-use controls.


Auto Shut-Off

As an extra safety measure, the oven will automatically shut off after 12 hours.

| | |
|---|--|
| Features | |
| Oven Control/Timing System | Ready-Select* |
| Window | Large |
| Exterior Door Finish | Stainless Steel (S), Color-Coordinated (W/B) |
| Handle Design | Stainless Steel (S), Color-Coordinated (W/B) |
| Oven Cleaning System | Self-Clean |
| Oven Controls | |
| Bake/Broil | Yes/Variable (Hi - Lo) |
| Convection Conversion | |
| Convection Bake/Broil/Roast | |
| Quick Bake Convection | |
| PowerPlus® / Quick Preheat | |
| Keep Warm | |
| Add-a-Minute | |
| Delay Start | |
| Self-Clean | 2, 3, 4 Hours |
| Rapid/Quick Clean Option | |
| Delay Clean | 2, 3, 4 Hours |
| Kitchen Timer | Yes |
| Timed Cook Option | Yes |
| Control Lock | Yes |
| Auto Oven Shut-Off | 12 Hours |
| Oven Lock-Out | Yes |
| Oven Features | |
| Capacity (Cu. Ft.) | 3.3 |
| Convection System | |
| Oven Light | 1 Halogen |
| Hidden Bake Element | |
| Rack Configuration | 2 Standard |
| Baking System | |
| Broiling System | Vari-Broil™ High/Low |
| Bake/Broil Element (Watts) | 2,100 / 3,400 |
| Certifications | |
| A.D.A. Compliant ¹ | Yes |
| Specifications | |
| Oven Interior (H x W x D) | 17-1/32" x 17-3/4" x 18-13/16" |
| Power Supply Connection Location | Left Bottom Rear |
| Voltage Rating | 240V / 208V / 60Hz |
| Connected Load (kW Rating) @ 240/208 Volts ² | 3.7 / 2.8 |
| Amps @ 240/208 Volts | 15.4 / 13.5 |
| Minimum Circuit Required (Amps) | 20 |
| Approved for Under-Counter Installation | |
| Shipping Weight (Approx.) | 115 Lbs. |

¹When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

²Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

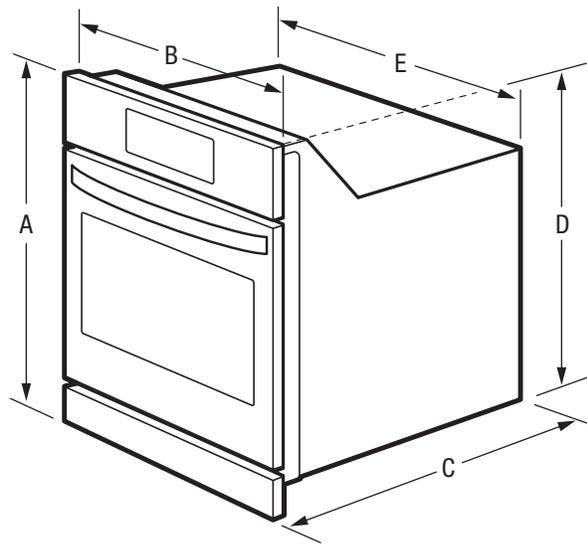


NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



| Product Dimensions | |
|---------------------------------|-------------------|
| A - Height | 31-7/16" |
| B - Width | 23-7/8" |
| C - Depth | 25-3/16" |
| D - Height (Wrapper) (Min./Max) | 27-1/2" / 29-1/8" |
| E - Width (Wrapper) | 21-3/4" |
| Depth with Door Open 90° | 46-3/16" |

| Cutout Dimensions | |
|-------------------|---------|
| Height (Min.) | 27-5/8" |
| Height (Max.) | 28" |
| Width (Min.) | 22" |
| Width (Max.) | 22-1/2" |
| Depth (Min.) | 24" |

Accessories information available on the web at frigidaire.com

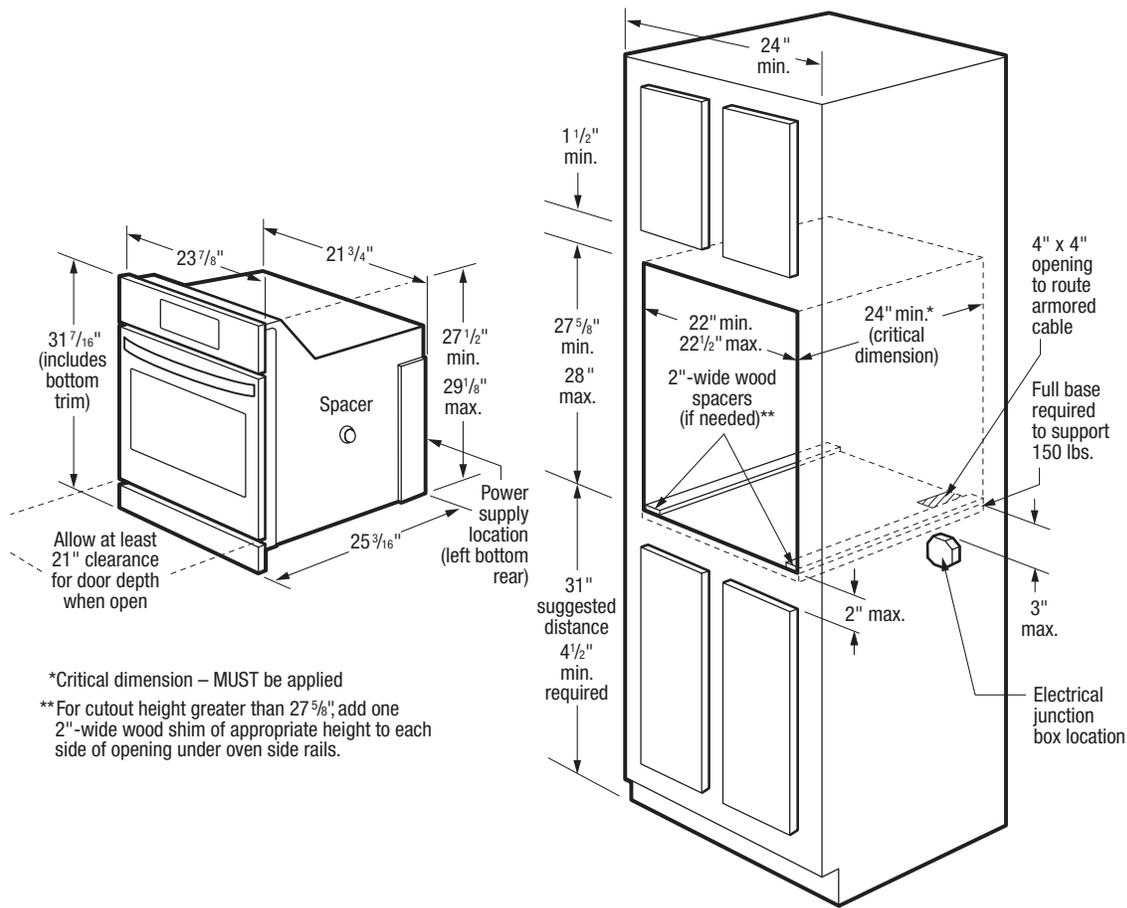

Single Wall Oven Specifications

- Product Shipping Weight (approx.) - 115 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- Connected Load (kW Rating) @ 240/208 Volts = 3.7/2.8kW
- Amps @ 240/208 Volts = 15.4/13.5 Amps
- Recommended Circuit Breaker - 20 Amps
- Always consult local and national electric codes.
- Minimum 21" clearance for oven door depth when open.
- Minimum required distance from floor is 4-1/2", recommended distance is 31".
- Minimum 24" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.

- To adapt oven to fit cutout height greater than 27-5/8", add one 2"-wide wood shim of appropriate height to each side of opening under oven side rails. Lifting oven will hide larger cutout opening at top and oven's bottom trim will hide shims at bottom.
- Full oven base of solid plywood or similar material required, capable of supporting 150 Lbs.
- Base must be level and cabinet front must be square.
- Single Wall Oven is NOT approved to be used in stackable or side-by-side installation.
- Single Wall Oven is approved to be used in under-counter installation.
- Single Wall Oven is NOT approved to be used in under-cooktop installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

