

# Freestanding Ranges

FGGF3035R F/W/B

30" Gas



## Product Dimensions

|                          |         |
|--------------------------|---------|
| Height (Max.)            | 48-1/2" |
| Width                    | 29-7/8" |
| Depth (Including Handle) | 29-1/4" |

## More Easy-To-Use Features

### Continuous Corner-to-Corner Grates

Move heavy pots & pans without lifting with continuous, corner-to-corner grates.

### Low Simmer Burner

Perfect for cooking delicate foods and sauces.

### Built with American Pride

Designed, engineered and assembled in the U.S.A. Appliances that are high-performing, more accessible, and more innovative than ever.

### Precision Set™ Controls

Adjust heat levels more precisely, providing exceptional temperature control.

## Available in:



Stainless  
(F)



White  
(W)



Black  
(B)

## Signature Features



### Quick Bake Convection

Bake faster and more evenly with Quick Bake Convection.



### One-Touch Quick Self Clean

Your oven cleans itself — so you don't have to. Self clean options available in 2-, 3- and 4-hour cycles.



### Smudge-Proof™ Stainless Steel

Resists fingerprints and cleans easily.




### Power Burner

Power Burner offers more power and faster boil time.

| Burners     | BTU    |
|-------------|--------|
| Right Front | 17,000 |
| Right Rear  | 5,000  |
| Left Front  | 9,500  |
| Left Rear   | 14,000 |
| Center      | 9,500  |

| Features                          |   |
|-----------------------------------|---|
| Oven Control/Timing System        | Express-Select® Controls                              |
| Surface Type                      | Black Porcelain (F), Color-Coord. Porcelain (W/B)     |
| Sealed Gas Burners                | Yes   |
| Grates                            | Continuous Cast Iron w/Black Matte Finish             |
| Window                            | Extra-Large   |
| Exterior Door Finish              | Smudge-Proof™ Stainless Steel (F), Color-Coord. (W/B) |
| Handle Design                     | Stainless Steel (F), Color-Coordinated (W/B)          |
| Exterior Finish (Side Panels)     | Black (F), Color-C. (W/B)                             |
| Convection System                 | Quick Bake Convection                                 |
| Oven Cleaning System              | Self Clean  |
| Drawer Functionality              | Storage   |
| Oven Controls                     |   |
| Bake/Broil                        | Yes/Variable (400-550°F)                              |
| Effortless™ Convection Conversion |   |
| Convection Bake/Broil/Roast       |   |
| Quick Bake Convection             | Yes   |
| Quick Preheat                     |   |
| My Favorite                       |   |
| Effortless™ Temperature Probe     |   |
| Pizza Button                      |   |
| Keep Warm                         | Yes   |
| Add-a-Minute                      |   |
| Delay Start                       |   |
| Self Clean                        | 2, 3, 4 Hours   |
| Quick Clean Option                | Yes   |
| Delay Clean                       | 2, 3, 4 Hours   |
| Kitchen Timer/Timed Cook Option   | Yes/No  |
| Auto Oven Shut-Off                |   |
| Oven Lockout                      | Yes   |
| Lower Drawer Control              |   |
| Cooktop Features                  |   |
| Right Front Burner (BTU)          | 17,000  |
| Right Rear Burner (BTU)           | 5,000   |
| Left Front Burner (BTU)           | 9,500   |
| Left Rear Burner (BTU)            | 14,000  |
| Center Extra Zone Burner (BTU)    | 9,500   |
| Oven Features                     |   |
| Capacity (Cu. Ft.)                | 5.0   |
| Oven Light                        | 1   |
| Rack Configuration                | 2 Standard  |
| Baking System                     | Even Baking Technology                                |
| Broiling System                   | Vari-Broil™ Hi/Lo                                     |
| Bake Burner/Broil Burner (BTU)    | 18,000/13,500   |
| Drawer Racks                      |   |
| Optional Accessories              |   |
| LP Gas Conversion Kit             | PN # GRLP4  |
| Specifications                    |   |
| Oven Interior (H x W x D)         | 18-5/8" x 24-3/8" x 19-1/8"                           |
| Power Supply Connection Location  | Left Bottom Rear                                      |
| Gas Supply Connection Location    | Right Bottom Rear                                     |
| Voltage Rating                    | 120V / 60Hz / 5A                                      |
| Amps @ 120 Volts                  | 5   |
| Shipping Weight (Approx.)         | 205 Lbs.  |

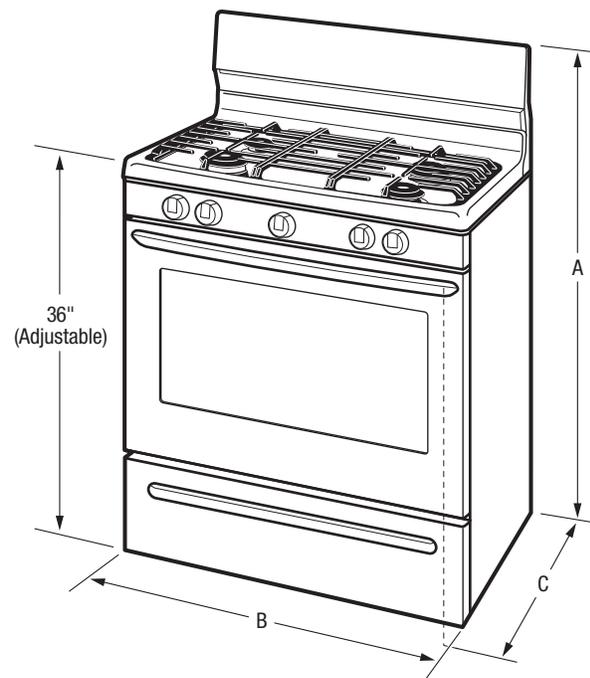

*NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).*



| Product Dimensions           |         |
|------------------------------|---------|
| A - Height (Max.)            | 48-1/2" |
| B - Width                    | 29-7/8" |
| C - Depth (Including Handle) | 29-1/4" |
| Depth with Door Open 90°     | 46-5/8" |

| Cabinet Cutout Dimensions |     |
|---------------------------|-----|
| Height (Standard)         | 36" |
| Width (Min.)              | 30" |
| Depth (Min.)              | 24" |

*Accessories information available on the web at [frigidaire.com](http://frigidaire.com)*


**FRIGIDAIRE**

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • [frigidaire.com](http://frigidaire.com)  
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

FGGF3035R 10/15

© 2015 Electrolux Home Products, Inc.

*Specifications subject to change.*

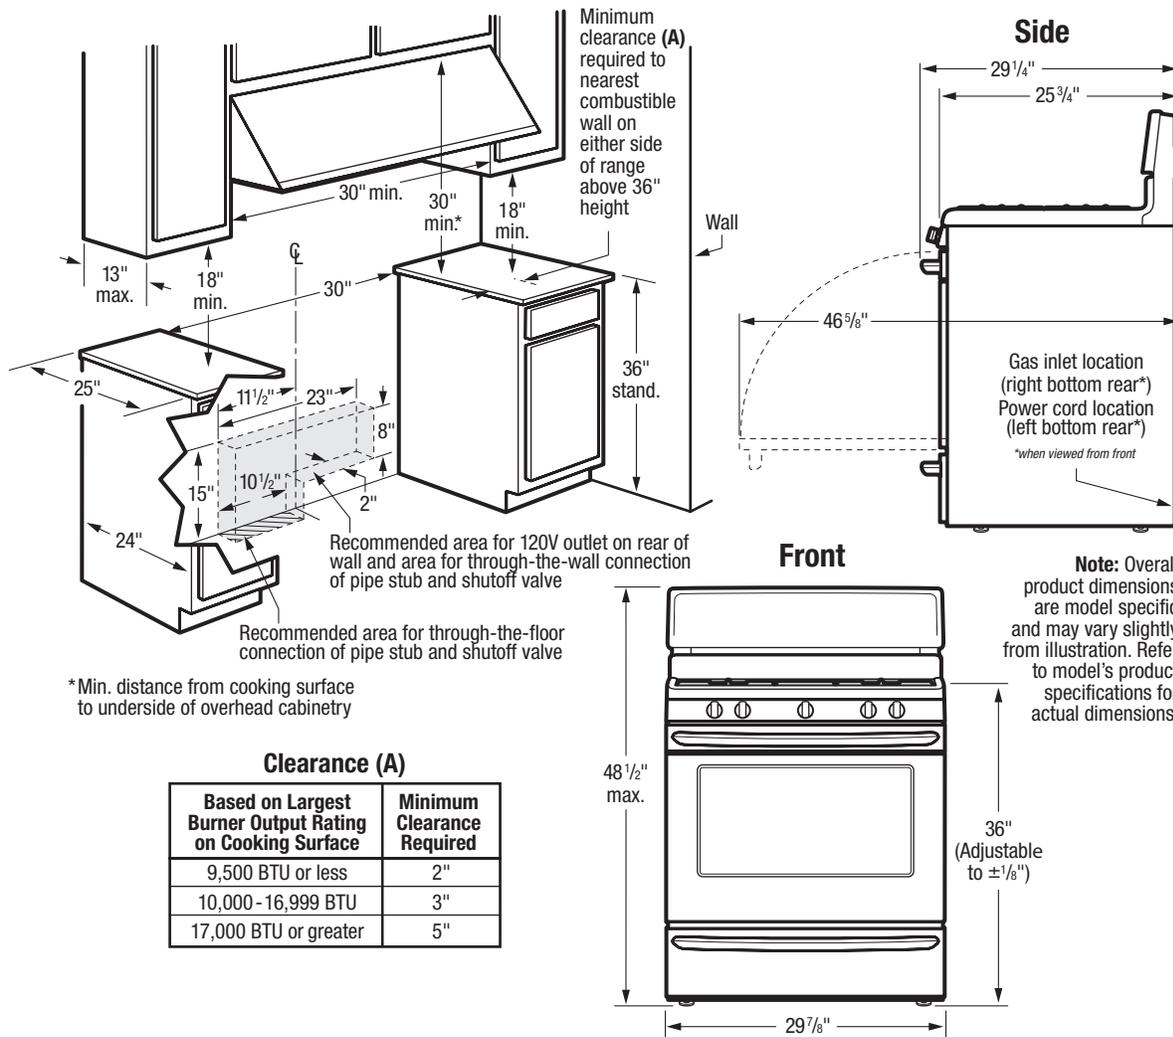

**Freestanding Range Specifications**

- Product Shipping Weight (approx.) - 205 Lbs.
- Voltage Rating - 120V/60 Hz/5 Amps
- Amps @ 120 Volts = 5 Amps
- Always consult local and national electric and gas codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90°F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Do not obstruct flow of combustion air at oven vent nor around base or beneath lower front panel of range. Range requires fresh air for proper burner combustion.
- Do not install range beneath any downward-blowing, overhead vent hood or air curtain.
- Range ships with 3/4" factory regulator.
- Range is LP Gas convertible. (Optional LP Gas conversion kit available.)
- Floor beneath range MUST be solid and level.

- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum clearance required (from edge of rangetop to nearest combustible wall on either side of range above 36" height) is based on largest burner output rating on cooking surface.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.

**Optional Accessories**

- LP Gas Conversion Kit - (PN# GRLP4).

