



# 2-in-1 Convertible Freezer/Refrigerator

FKC17F7QT

Frost-Free 17 Cu. Ft.



## Signature Features

### Convertible Freezer to Refrigerator

Select the option to use as an all freezer or all refrigerator when it's best for your needs.

### Frost-Free Operation

Never defrost your freezer again.

### Bright Lighting

Our bright lighting makes it easy to see what's inside.

### Store-More™ Adjustable Door Bins

Flexible storage options, with door bins designed to reposition with ease to fit your needs.

## Product Dimensions

Height (Including Hinges)	65-7/8"
Width	32"
Depth (Including Door)	26-5/8"

## More Easy-To-Use Features

**Adjustable Temperature Control**  
Select the correct temperature for your needs.

- Colour-Coordinated Handle
- Reversible Door Swing Option
- 2 Clear Crispers w/ Humidity Controls
- 3 Full-Width Glass Shelves
- Gallon Door Storage
- Clear Dairy Door



Available in:



Classic Slate  
(T)

Features	
Door Handle Design	Reach-Through
Reversible Door	Yes
Automatic Door Closer	Yes
Leveling Legs	Yes
Defrost	Frost-Free
Adjustable Temperature Control	Yes
Interior Lighting	Bright
Full-Width Adjustable Shelves	2 Glass
Full-Width Fixed Shelves	1 Glass
Crisper Drawer	2 Clear
Humidity Controls	2
Store-More™ Adjustable Door Bins	4 Clear
Full-Width Door Bins	1 White
Convertible	Yes
Certifications	
CSA Rating	Household
Specifications	
Total Capacity (Cu. Ft.)	16.7
Shelf Area (Sq. Ft.)	17.6
Annual Energy (kW)	615
Annual Energy Cost (.1065/kWh)	\$65
Power Supply Connection Location	Lower Right Rear
Voltage Rating	120V/60Hz/15A
Connected Load (kW rating) @ 120 Volts <sup>1</sup>	.6
Amps @ 120 Volts	5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	205 Lbs.

<sup>1</sup>An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

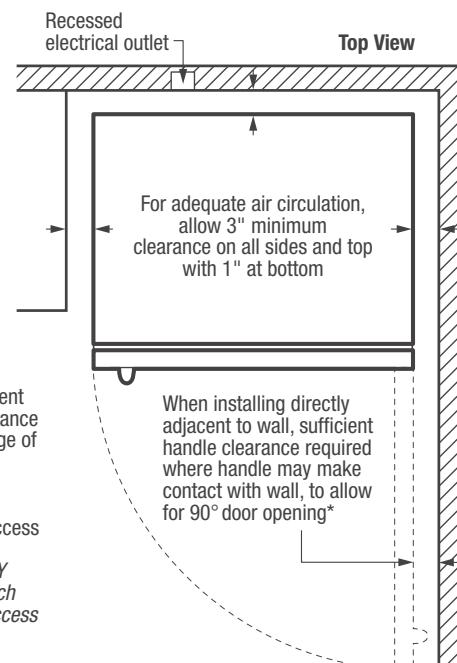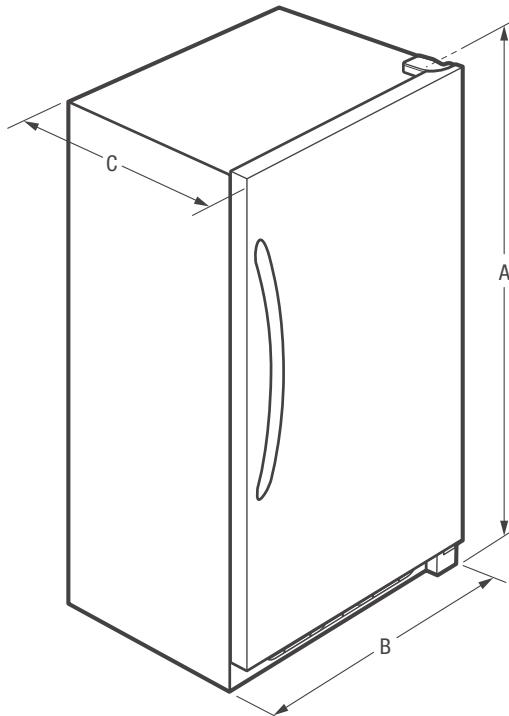

\* When installing freezer adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete basket access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited basket access with restricted removal.)

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.ca](http://frigidaire.ca).



Product Dimensions	
A - Height (Including Hinges)	65-7/8"
B - Width	32"
C - Depth (Including Door)	26-5/8"
D - Depth with Door Open 90°	57-1/2"

Accessories information available on the web at [frigidaire.ca](http://frigidaire.ca)