

## CFIF3054TS

### FREESTANDING RANGE

30" INDUCTION



#### AVAILABLE COLOURS



Stainless

#### PRODUCT DIMENSIONS

|                      |           |
|----------------------|-----------|
| Height (Max.)        | 47"       |
| Width                | 29-7/8"   |
| Depth (Incl. Handle) | 28-13/32" |

#### MORE EASY-TO-USE FEATURES

##### True Temperature Melt & Hold

Get perfectly melted goodness with True Temperature Melt & Hold that delivers low, precise heat for melting delicate ingredients or sauces without scorching or burning for up to one hour.

##### Temperature Precision

Sear steaks, crisp sandwiches, melt chocolate, or simmer sauces with the precise temperature control of induction.

##### Controlled Cooking

Effortlessly create your favourite recipes with Induction's immediate temperature response that adjusts from a powerful boil to a low simmer.

##### Quick Clean

Quickly clean your oven in 2 hours with the self-clean cycle.

##### Safe Surface

The Safe Surface — Induction only heats pans and the food in them: the area around the pans stays cool to the touch.

##### Energy Efficiency

Since induction only heats your cookware and not your kitchen, less energy is lost throughout the cooking process.

<sup>1</sup>8" induction right front burner compared to 3000W Electric Element, 6 qt./10" diameter pot, 1 qt. tepid water.

### SIGNATURE FEATURES

#### Amazingly Fast

Get amazingly fast heat with induction that transfers heat directly to the cookware and not the surface of the cooktop, which means you can boil water 50% faster than a conventional electric cooktop.<sup>1</sup>

#### Even Heat

Whip up delicious meals with induction that delivers incredibly even heat across the surface of the pan so you get golden results every time.

#### Easy To Clean

Don't stress over spills with induction's easy-to-clean surface that generates heat only to your pan, not your cooktop, meaning spills can't burn onto the surface.

#### Auto Sizing™ Pan Detection

Make fluffy pancakes with ease using Auto Sizing™ Pan Detection that automatically senses the size of your pan to only send heat to whatever small, medium, or large pan you are using.

| ELEMENTS    | SIZE         | WATTS |
|-------------|--------------|-------|
| Right Front | Induction 8" | 3,600 |
| Right Rear  | Induction 6" | 2,500 |
| Left Front  | Induction 7" | 2,800 |
| Left Rear   | Induction 7" | 2,800 |

# CFIF3054TS FREESTANDING RANGE

30" INDUCTION

FRIGIDAIRE

## FEATURES

|                               |                        |
|-------------------------------|------------------------|
| Oven Control/Timing System    | Ready-Select® Controls |
| Surface Type                  | Black Ceramic Glass    |
| Window                        | Extra-Large            |
| Exterior Door Finish          | Stainless              |
| Handle Design                 | Stainless              |
| Exterior Finish (Side Panels) | Black                  |
| Convection System             |                        |
| Oven Cleaning System          | Self Clean             |
| Drawer Functionality          | Storage                |

## OVEN CONTROLS

|                                   |                             |
|-----------------------------------|-----------------------------|
| Bake/Broil                        | Yes/Variable (400 - 500 °F) |
| Effortless™ Convection Conversion |                             |
| Convection Bake/Broil/Roast       |                             |
| Quick Bake Convection             |                             |
| Quick Preheat                     |                             |
| Effortless™ Temperature Probe     |                             |
| Keep Warm                         |                             |
| Add-a-Minute                      |                             |
| Delay Start                       |                             |
| Self Clean                        | 2, 3 Hours                  |
| Quick Clean Option                | Yes                         |
| Delay Clean                       | Yes                         |
| Kitchen Timer/Timed Cook Option   | Yes/Yes                     |
| Auto Oven Shut-Off                | 12 Hours                    |
| Oven Lock-Out                     | Yes                         |
| Lower Drawer Control              |                             |

## COOKTOP FEATURES

|                              |                      |
|------------------------------|----------------------|
| Right Front Element (Watts)  | Induction 8" - 3,600 |
| Right Rear Element (Watts)   | Induction 6" - 2,500 |
| Left Front Element (Watts)   | Induction 7" - 2,800 |
| Left Rear Element (Watts)    | Induction 7" - 2,800 |
| Hot Surface Indicator Light  | Yes                  |
| Element "On" Indicator Light | Yes                  |

## OVEN FEATURES

|                                    |                        |
|------------------------------------|------------------------|
| Capacity (Cu.Ft.)                  | 5.3                    |
| Oven Light                         | 1                      |
| Hidden Bake Element                |                        |
| Rack Configuration                 | 2 Standard             |
| Baking System                      | Even Baking Technology |
| Broiling System                    | Vari-Broil™ High/Low   |
| Bake Element/Broil Element (Watts) | 2,600/3,000            |
| Drawer Racks                       |                        |

## SPECIFICATIONS


|                                               |                             |
|-----------------------------------------------|-----------------------------|
| Oven Interior (H x W x D)                     | 19-3/4" x 24-3/8" x 19-1/8" |
| Power Supply Connection Location              | Middle Bottom Rear          |
| Voltage Rating                                | 240V/208V/60Hz              |
| Connected Load (kW Rating)<br>@ 240/208 Volts | 12.5/9.5                    |
| Amps @ 240 Volts                              | 40 Amps                     |
| Minimum Circuit Required (Amps)               | 40                          |
| Shipping Weight (Approx.)                     | 195 Lbs.                    |

## PRODUCT DIMENSIONS

|                          |           |
|--------------------------|-----------|
| A - Height (Max.)        | 47"       |
| B - Width                | 29-7/8"   |
| C - Depth (Incl. Handle) | 28-13/32" |
| Depth with Door Open 90° | 48-5/8"   |

## CABINET CUTOUT DIMENSIONS

|                   |         |
|-------------------|---------|
| Height (Standard) | 36"     |
| Width (Min.)      | 30-1/8" |
| Depth (Min.)      | 24"     |

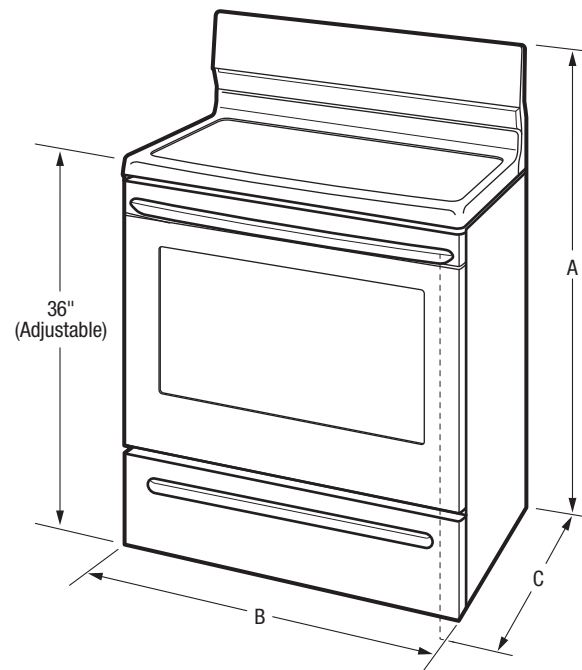


**Note:** For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.ca](http://frigidaire.ca).

Specifications subject to change. Accessories information available on the web at [frigidaire.ca](http://frigidaire.ca)

FRIGIDAIRE

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

CFIF3054T 10/17  
© 2017 Electrolux Major Appliances, NA

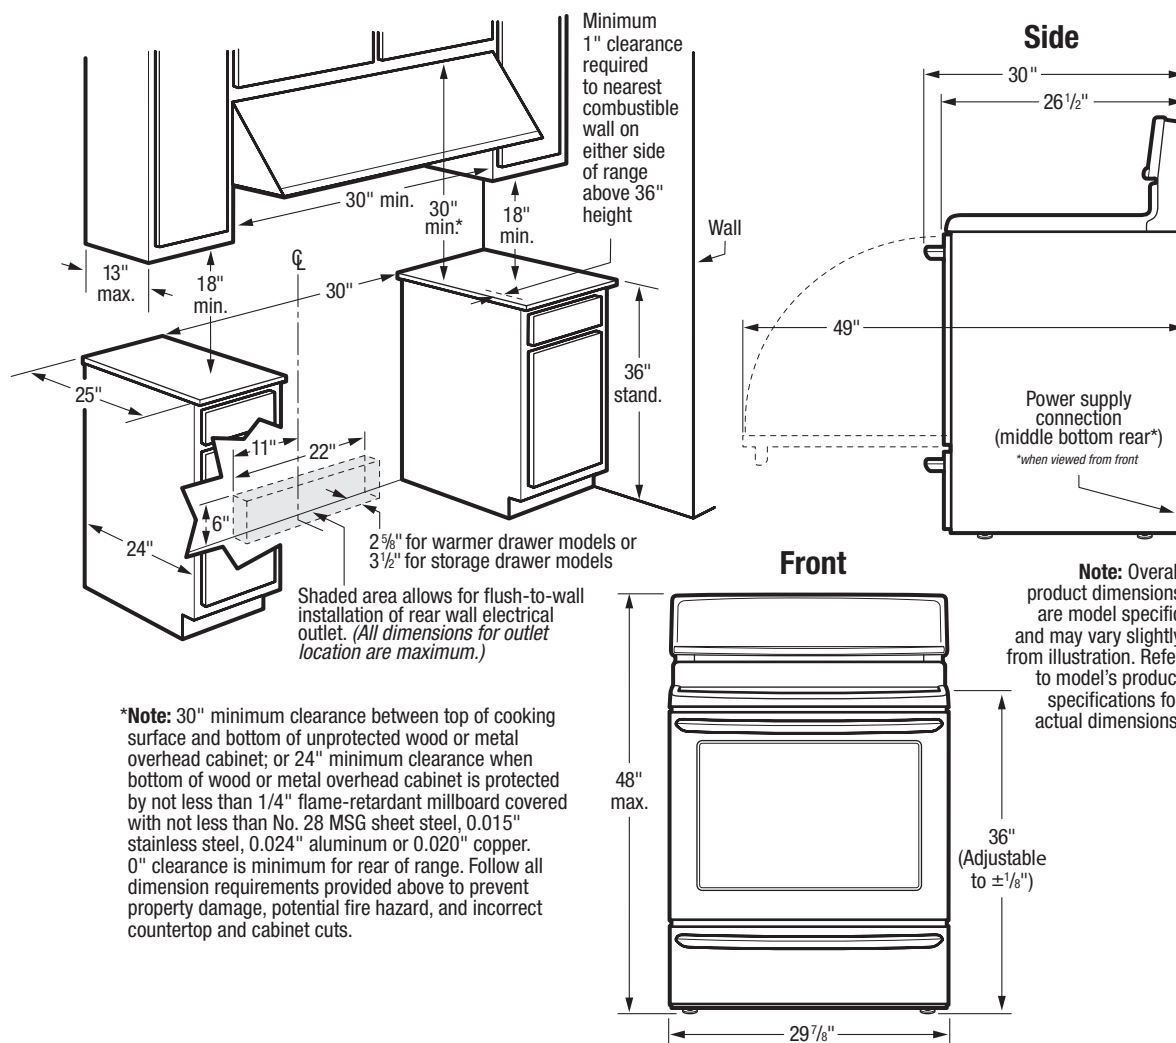

## INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) - 195 Lbs.
- Four-conductor (240 V) electrical outlet with correct voltage and polarization required, installed by qualified electrician. Outlet must be properly installed and grounded in accordance with Canadian Electrical Code (CSA Standard C22.1, Part 1 — latest edition) and any local electrical code requirements.
- Connected Load (kW Rating) @ 240/208 Volts = 12.5/9.5kW
- Recommended Circuit Breaker - 40 Amps
- Make sure wall coverings around range can withstand heat generated by range.
- Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum 1" clearance required from edge of rangetop to nearest combustible wall on either side of range above 36" height.
- Allow 30" minimum clearance between top of cooking surface and bottom of unprotected wood or metal overhead cabinet; or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.



FRIGIDAIRE

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • [frigidaire.ca](http://frigidaire.ca)

**Note:** For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.ca](http://frigidaire.ca).

*Specifications subject to change. Accessories information available on the web at [frigidaire.ca](http://frigidaire.ca)*

CFIF3054T 10/17

© 2017 Electrolux Major Appliances, NA