

# FRIGIDAIRE GALLERY


## Freestanding Ranges

FGGF3032M F/W/B

30" Gas



### Signature Features

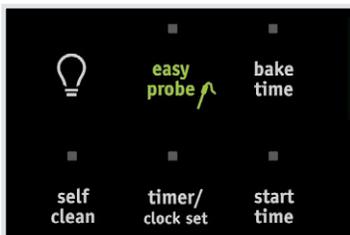

#### Easy™ Temperature Probe

Use this easy temperature probe to instantly get the internal cooking temperature with just the touch of a button for better cooking results.



#### Quick Boil

Boils water faster.



#### Express-Select® Controls

Easily go from warm to boil.



#### Smudge-Proof™ Stainless Steel<sup>1</sup>

Real Stainless Steel with a protective coating reduces fingerprints and smudges so it's easy to clean.

### Product Dimensions

|                          |         |
|--------------------------|---------|
| Height (Max.)            | 47-3/4" |
| Width                    | 29-7/8" |
| Depth (Including Handle) | 29-1/4" |

### More Easy-To-Use Features

#### Quick Bake Convection

Bake faster and more evenly with Quick Bake Convection.

#### Low Simmer Burner

Perfect for delicate foods and sauces.

#### Continuous Grates

Continuous Grates make it easy to move heavy pots and pans between burners without lifting.

#### Even Baking Technology

Our latest technology ensures even baking every time.

#### Auto Oven Shut Off

As an extra safety measure, the oven will automatically shut off after 12 hours.

#### One-Touch Self Clean

Start the self-cleaning cycle with just the touch of a button.

#### Quick Clean

For a quick, light oven cleaning.

#### Delay Start

Set your oven to begin cooking on your schedule. It can be programmed from one to 24 hours.

#### Available in:



Stainless  
(F)


White  
(W)

Black  
(B)

| Burners           | BTU    |
|-------------------|--------|
| Right Front       | 17,000 |
| Right Rear        | 5,000  |
| Left Front        | 9,500  |
| Left Rear         | 14,000 |
| Center Extra Zone | 9,500  |

<sup>1</sup>Select model only.

|   |  |
|---|--|
| <b>Features</b>                                 |  |
| Oven Control/Timing System                      | Express-Select® Controls                             |
| Surface Type                                    | Black Porcelain (F), Color-Coordinated (W/B)         |
| Sealed Gas Burners                              | Yes  |
| Grates  | Continuous Cast Iron w/Black Matte Finish            |
| Window  | Extra-Large  |
| Exterior Door Finish                            | Smudge-Proof™ Stainless Steel (F), Color-Coord.(W/B) |
| Handle Design                                   | Stainless Steel (F), Color-Coordinated (W/B)         |
| Exterior Finish (Side Panels)                   | Black (F), Color-C. (W/B)                            |
| Convection System                               | Quick Bake Convection                                |
| Oven Cleaning System                            | Self Clean   |
| Drawer Functionality                            | Storage  |
| <b>Oven Controls</b>                            |  |
| Bake/Broil                                      | Yes/Low and High                                     |
| Effortless™ Convection Conversion               |  |
| Convection Bake/Broil/Roast                     |  |
| Quick Bake Convection                           | Yes  |
| Quick Preheat                                   |  |
| My Favorite                                     |  |
| Easy™ Temperature Probe                         | Yes  |
| Pizza Button                                    |  |
| Keep Warm                                       |  |
| Add-a-Minute                                    |  |
| Delay Start                                     | Yes  |
| Self Clean                                      | Yes  |
| Quick Clean Option                              | Yes  |
| Delay Clean                                     | 2, 3 Hours   |
| Kitchen Timer/ Timed Cook Option                | Yes/Yes  |
| Auto Oven Shut-Off                              | 12 Hours   |
| Oven Lockout                                    | Yes  |
| Lower Drawer Control                            |  |
| <b>Cooktop Features</b>                         |  |
| Right Front Burner (BTU)                        | 17,000   |
| Right Rear Burner (BTU)                         | 5,000  |
| Left Front Burner (BTU)                         | 9,500  |
| Left Rear Burner (BTU)                          | 14,000   |
| Center Extra Zone Burner (BTU)                  | 9,500  |
| <b>Oven Features</b>                            |  |
| Capacity (Cu. Ft.)                              | 5.0  |
| Oven Light                                      | 1  |
| Rack Configuration                              | 1 Flat, 1 Offset                                     |
| Baking System                                   | Even Baking Technology                               |
| Broiling System                                 | Vari-Broil™ Hi/Lo                                    |
| Bake Burner/Broil Burner (BTU)                  | 18,000/13,500  |
| Drawer Racks                                    |  |
| <b>Optional Accessories</b>                     |  |
| LP Gas Conversion Kit                           | PN# GRLP3  |
| <b>Specifications</b>                           |  |
| Oven Interior (H x W x D)                       | 17-5/8" x 24-3/8" x 19-3/4"                          |
| Power Supply Connection Location                | Left Bottom Rear                                     |
| Gas Supply Connection Location                  | Right Bottom Rear                                    |
| Voltage Rating                                  | 120V / 60Hz / 15A                                    |
| Conn. Load (kW Rating) @ 120 Volts <sup>1</sup> | 1.8  |
| Amps @ 120 Volts                                | 15   |
| Shipping Weight (Approx.)                       | 215 Lbs.   |

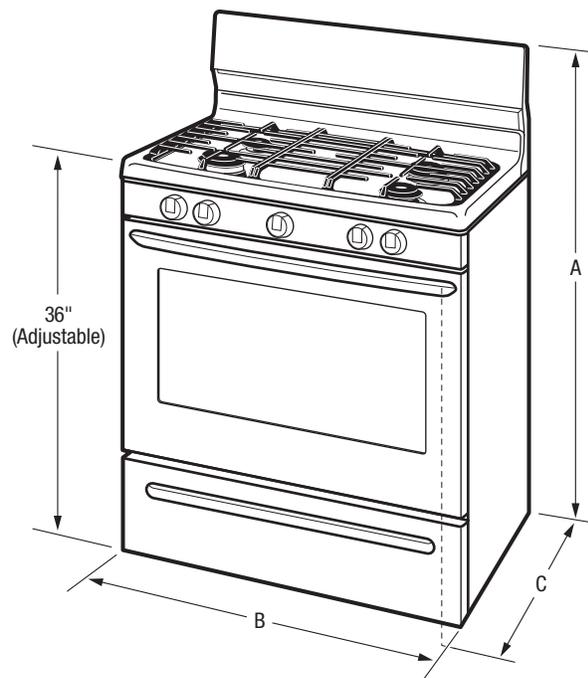

*NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com](http://frigidaire.com).*




| Product Dimensions           |         |
|------------------------------|---------|
| A - Height (Max.)            | 47-3/4" |
| B - Width                    | 29-7/8" |
| C - Depth (Including Handle) | 29-1/4" |
| Depth with Door Open 90°     | 46-5/8" |

| Cutout Dimensions |     |
|-------------------|-----|
| Height (Standard) | 36" |
| Width (Min.)      | 30" |
| Depth (Min.)      | 24" |

<sup>1</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Accessories information available on the web at [frigidaire.com](http://frigidaire.com)

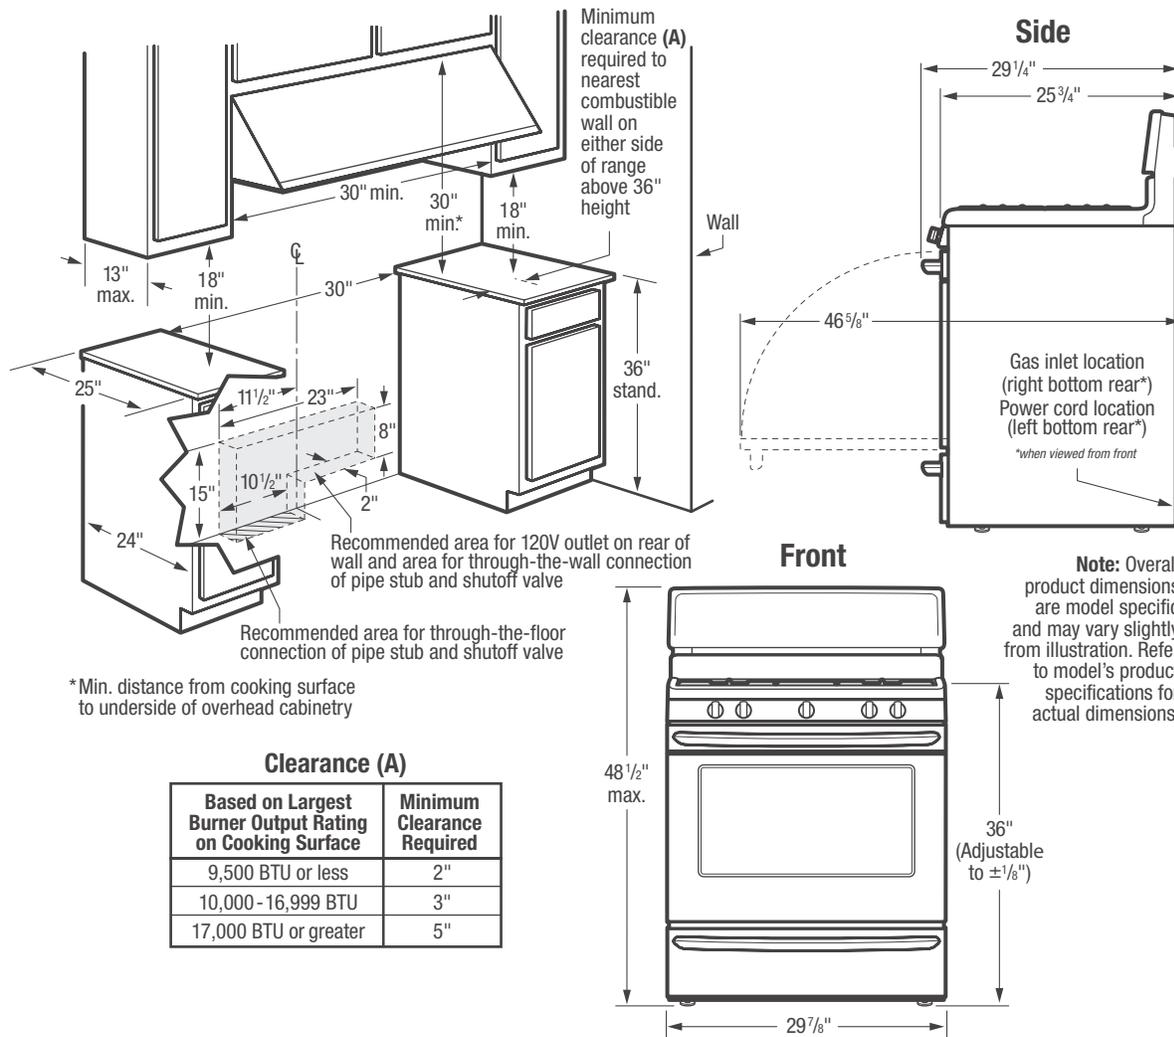

**Note:** Overall product dimensions are model specific and may vary slightly from illustration. Refer to model's product specifications for actual dimensions.

**Freestanding Range Specifications**

- Product Shipping Weight (approx.) - 215 Lbs.
- Voltage Rating - 120V / 60 Hz / 15 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.8kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 15 Amps
- Always consult local and national electric and gas codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90° F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Do not obstruct flow of combustion air at oven vent nor around base or beneath lower front panel of range. Range requires fresh air for proper burner combustion.
- Do not install range beneath any downward-blowing, overhead vent hood or air curtain.
- Range ships with 3/4" factory regulator.
- Range is LP Gas convertible. (Optional LP Gas Conversion Kit available.)

- Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum clearance required (from edge of rangetop to nearest combustible wall on either side of range above 36" height) is based on largest burner output rating on cooking surface.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

**Note:** For planning purposes only. Refer to Product Installation Guide on the web at [frigidaire.com](http://frigidaire.com) for detailed instructions.

**Optional Accessories**

- LP Gas Conversion Kit - (PN# GRLP3)

