



7 Cu. Ft. Electric Dryer

Dryer

Available Products: FLVE752CBW

Available Colors: White

Version: 10/25

## Product Specifications

### Dryer

Drum Back Type	Stainless Steel
Drum Material	Aluminized Alloy Steel
Dryness Level Selections	Yes
Moisture Sensor	Yes

### Dryer Options

Child Lock	Yes
Damp Dry Signal	Yes
Time Adjust (Add Time)	Yes
Time Adjust (Remove Time)	Yes

### Dryness Level

Max	Yes
Normal	Yes
More Dry	Yes
Less	Yes

### Exterior

Reversible Door	Yes
-----------------	-----

### Energy Data

kWh/cycle	2.27 kWh
kWh/year	641 kWh

### General Specifications

Chime On / Chime Off	Yes
Leveling Legs	Yes
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

### Right to Repair Details

Right to Repair	Available - Visit <a href="http://frigidaire.ca/right-to-repair">frigidaire.ca/right-to-repair</a> for more information
-----------------	---

### Dryer Cycles

Cycle Count	10
Active Wear	Yes
Air Fluff	Yes
Bulky	Yes
Delicates	Yes
Fast Dry	Yes
Heavy Duty	Yes
Normal	Yes
Sanitize	Yes
Timed Dry Time	Yes

### Drying Temperatures

Low	Yes
Medium	Yes
High	Yes
Maximum	Yes

### Controls

Child Lock	Yes
------------	-----

### Dimensions and Volume

Height	43 1/10"
Width	27"
Depth	30 1/10"
Dryer Drum Capacity	7 Cu. Ft.

### Installation

Ventilation Type	Vented
------------------	--------

### Safety Certifications and Approvals


CSA Listed	Yes
UL Listed	Yes

Installation Diagram

Installation in a Recess or Closet

- 1 A dryer installed in a bedroom, bathroom, recess or closet, MUST be exhausted outdoors.
  - 2 No other fuel burning appliance shall be installed in the same closet as the gas dryer.
  - 3 Your dryer needs the space around it for proper ventilation.
- DO NOT install your dryer in a closet with a solid door.
- 4 Closet door ventilation required: A minimum of 120 square inches (774.2 cm<sup>2</sup>) of opening, equally divided at the top and bottom of the door, is required. Openings should be located 3 inches (7.6 cm) from bottom and top of door. Openings are required to be unobstructed when a door is installed. A louvered door with equivalent air openings for the full length of the door is acceptable.

Dryer Dimensions

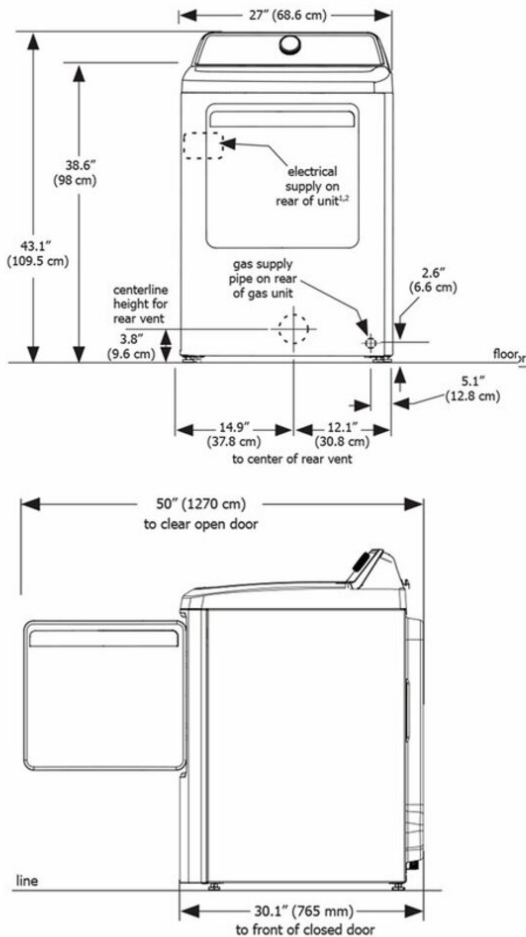

MINIMUM INSTALLATION CLEARANCES - Inches (cm)				
	SIDES	REAR	TOP	FRONT
Alcove	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	n/a
Closet	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	2" (5.1 cm)

