

CFLE3900UW



AVAILABLE COLOURS



White

LAUNDRY CENTRE

4.5 CU.FT. I.E.C. WASHER
5.5 CU.FT. DRYER
ELECTRIC

PRODUCT DIMENSIONS

Height	76"
Width	27"
Depth	31-1/2"

MORE EASY-TO-USE FEATURES

10 Wash Cycles

Features 10 wash cycles to meet all of your washing needs such as Delicate, Activewear, Bulky and Colours.

6 Dry Cycles

Features 6 dry cycles to meet all of your drying needs such as Delicate, Activewear, Bulky, and Air Fluff.

4 Timed Dryer Cycles

Select your desired drying time limit that works with your schedule.

Cycle Status Lights

Green LED lights keep you informed on when the cycle is washing, rinsing, spinning and done.

End-of-Cycle Signal

Always know when your laundry is done with the end-of-cycle beep.

SIGNATURE FEATURES

Excellent Cleaning Performance

The movement of the agitator gives you an excellent cleaning performance to ensure your clothes come out clean.

MaxFill™

MaxFill™ option allows for the maximum water level for the selected cycle.

Largest Washer Capacity

Fit more in every load with 4.5 cu.ft. washer capacity.

Quick Wash and Dry Cycles

Get a load done faster with quick wash and quick dry cycles.

CFLE3900UW

LAUNDRY CENTRE

ELECTRIC

FRIGIDAIRE

WASHER FEATURES

Washer Type	Top Load
Total Capacity (Cu.Ft.)	4.5 I.E.C.
Controls	Ready-Select®
Washer Interior	Stainless Steel
Vibration Control System	Yes
Wash System	Agitator
Fresh Water Rinse	Yes
Water Level Adjustments	3
Bleach Dispenser / Detergent Dispenser	Yes/No
Cycle Signal	Yes
Agitate Speeds (Strokes/Min.)	Variable
Spin Speeds (RPM)	850

WASH CYCLES

Wash Cycles	10
-------------	----

WASHER OPTIONS

Temperature Selections	3
Water Levels	3 Options

DRYER FEATURES

Total Capacity (Cu.Ft.)	5.5
Dryer Drum Interior	Painted Steel
Cycle Signal	Yes
Tumble Speed (RPM)	50
Lint Screen	Yes

DRY CYCLES

Dry Cycles	6
------------	---

DRYER OPTIONS

Temperature Selections	3
Dryness Level Selections	0
Timed Dry (Minutes)	15, 30, 60, 90


SPECIFICATIONS

Maximum Exhaust Duct Length ¹ (Ft.)	56
Power Supply Connection Location	Middle Rear
Water Inlet Connection Location	Right Rear
Voltage Rating	240V / 60Hz / 30A
Connected Load (kW Rating) @ 240 Volts	5.1
Amps @ 240 Volts	22
Heating Element @ 240 Volts (Watts)	4,500
Shipping Weight (Approx.)	275 Lbs.

¹Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

PRODUCT DIMENSIONS

A - Height	76"
B - Width	27"
C - Depth	31-1/2"
Depth with Door Open 90°	47-1/2"

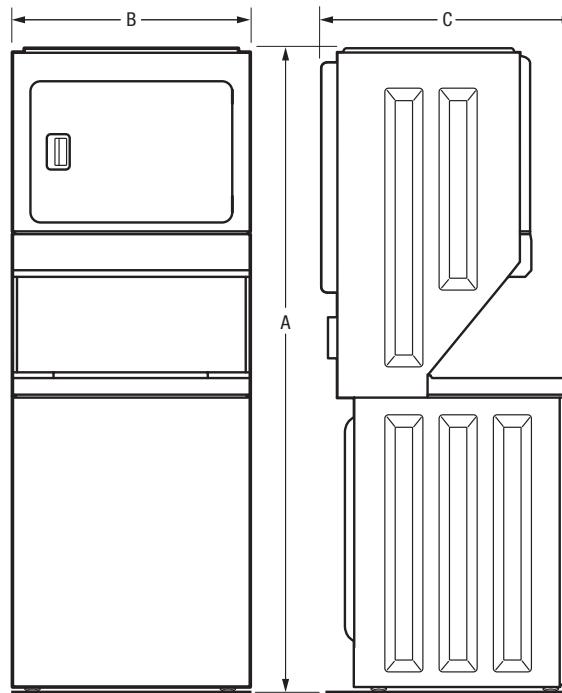

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.


Specifications subject to change. Accessories information available on the web at frigidaire.ca

FRIGIDAIRE

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

CFLE3900UW 04/18

© 2018 Electrolux Major Appliances, NA

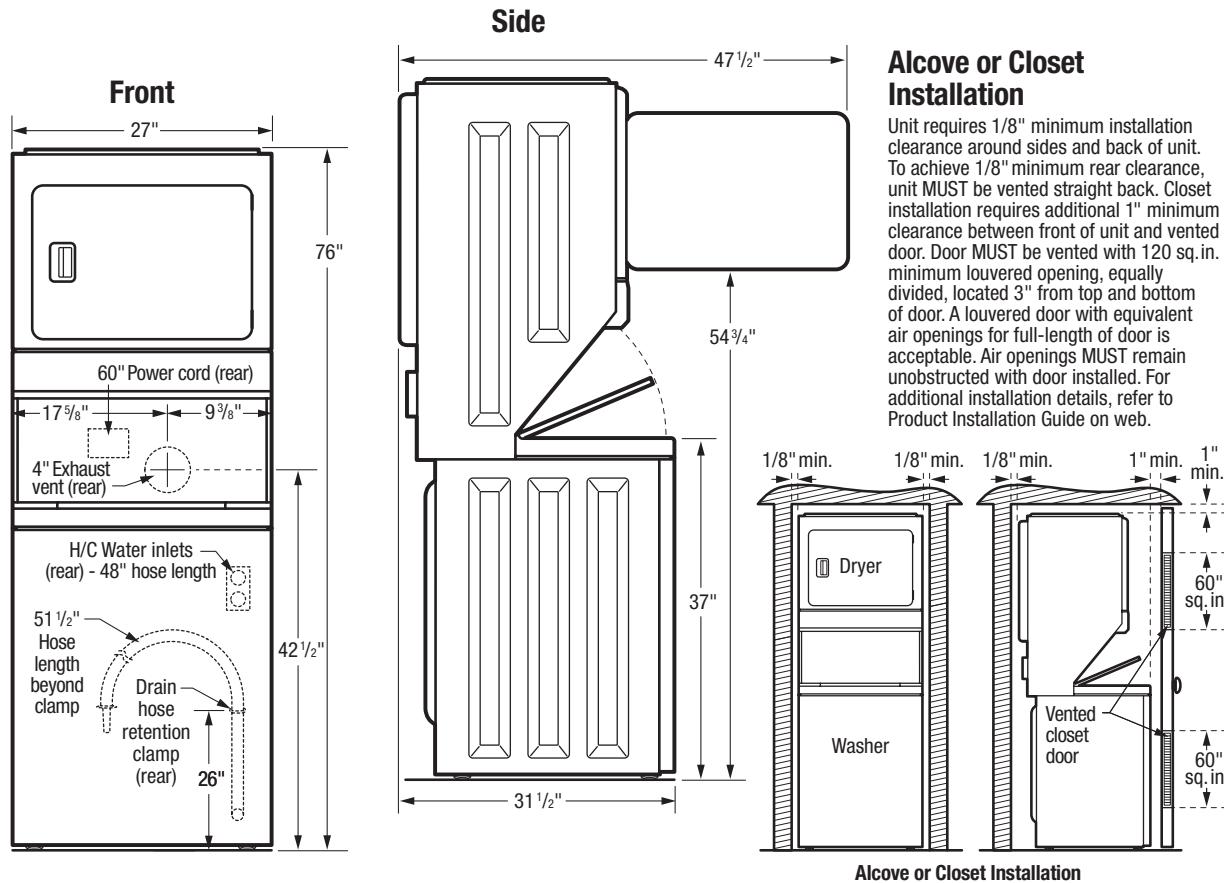

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) - 275 Lbs.
- Designed for HOME USE only, not recommended for commercial application.
- Single phase 3- or 4-wire cable, 240 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- Voltage Ratings - 240V/60Hz/30A
- Amps @ 240 Volts = 22
- Connected Load (kW Rating) @ 240 Volts = 5.1 kW
- Unit MUST employ a 3-conductor NEMA 10-30 type SRDT or 4-conductor NEMA 14-30 type SRDT or ST (as required), rated at 240 volt AC minimum, 30 amp power supply cord marked for use with clothes dryers (not supplied).
- Grounding through neutral link prohibited in specific applications and certain locales, requiring use of 4-wire system. (For detailed electrical requirements, refer to Product Installation Guide on web.)
- Always consult local and national electric & plumbing codes.
- Can be installed in alcove or closet requiring 1/8" minimum installation clearance around sides and back of unit. To achieve 1/8" minimum rear clearance, dryer MUST be vented straight back. Closet installation requires additional 1" minimum clearance between front of unit and vented door. Door MUST be vented with 120 sq.in. minimum louvered opening, equally divided, located 3" from top and bottom of door. A louvered door with equivalent air openings for full-length of door is acceptable. Air openings MUST remain unobstructed with door installed. (For additional installation details, refer to Product Installation Guide on web.)
- Do NOT install in area exposed to dripping water or outdoor weather conditions; where gasoline or other flammables are kept or stored; or where dryer comes in contact with curtains, drapes or anything that will obstruct flow of combustion and ventilation air.
- For garage installation, dryer MUST be located minimum 18" above floor.
- Floor MUST be solid with 1/2" maximum slope. Do NOT install on carpeted surface.
- Dryer MUST exhaust to outside of building, NOT into any concealed space.

- Exhaust installation requires minimum 4"-diameter rigid or semi-rigid metal duct with approved, unobstructed vent hood having swing-out damper(s). If installing rigid metal duct (preferred), do not exceed MAXIMUM venting run length of 56 ft., allow deductions for elbows and vents. If installing semi-rigid metal duct, do not exceed MAXIMUM venting run length of 8 ft., always allow deductions for elbows and vents (Refer to Product Installation Guide on web for additional information). Do NOT use flexible plastic or metal foil duct and use shortest run possible.
- Flush-to-wall installation allows for 4-way exhausting — straight back, down, left and right. While vertical exhausting is acceptable, certain circumstances could affect dryer's performance; and unit will be positioned 4-1/2" from wall. (Flush-to-wall exhausting may be done by going below dryer, then sideways.)
- H/C water faucets MUST be installed within 42" of washer's water inlet and MUST be 3/4" with threading for laundry hose connection to connect to 48" inlet hoses.
- Water pressure MUST be between 20 and 120 psi with NOT more than 10 psi pressure difference between hot and cold.
- Drain standpipe requires diameter of 1-1/4" min. and height of 33" min./65" max. above floor, capable of eliminating 17 gallons per minute. Attached 52" drain hose can reach 65"-high standpipe.
- Leveling legs supplied to level dryer properly and reduce excessive noise and vibration.
- For manufactured or mobile home installation optional Mobile Home Installation Kit (PN # 137067200) required. (For specific installation details, refer to Product Installation Guide on web.)

